



ALROC - MV - Case CNPT/240-2-MV

ISO 9001

BUREAU VERITAS
Certification



C
N
P
T/
240
-2
-MV

ALROC

Z.I de la
fonderie
72160 Tuffé
France

Phone :
33.(0)2.43.71.11.80
Fax :
33.(0)2.43.71.16.51
Web : www.alroc.fr
E-mail :
commercial@alroc.fr
info@alroc.fr

CABLES :

C33-226 « POPY » « NIKOL » « VINYL »
UTE C33-223 « Câble 2000 »
NFC 33 223 HN33S23



FUNCTIONS

CNPT/240-2-MV Alroc case allows to prepare câbles from sections 50mm² to 240mm².

ADVANTAGES : Less tools

- ☞ 1 MF2/40 tool for outer sheath + insulation
- ☞ 1 MF1+ tool for bonded and peelable semi conductor
- ☞ Very easy use
- ☞ 2 operators working together to strip the cables
- ☞ Very fast dismounting handles

Qualified and approved
EDF


CHARACTERISTICS

- ☞ Outer sheath
- ☞ Insulation
- ☞ Pelable semi-conducteur
- ☞ Bonded semi-conductor (Removal and Scraping)
- ☞ Outer sheath splitting
- ☞ Outer sheath spreading
- ☞ Outer sheath tightening

L : 575 mm Weight : 10,1kg
l : 470 mm
H : 145 mm



CNPT/240-2-MV Composition

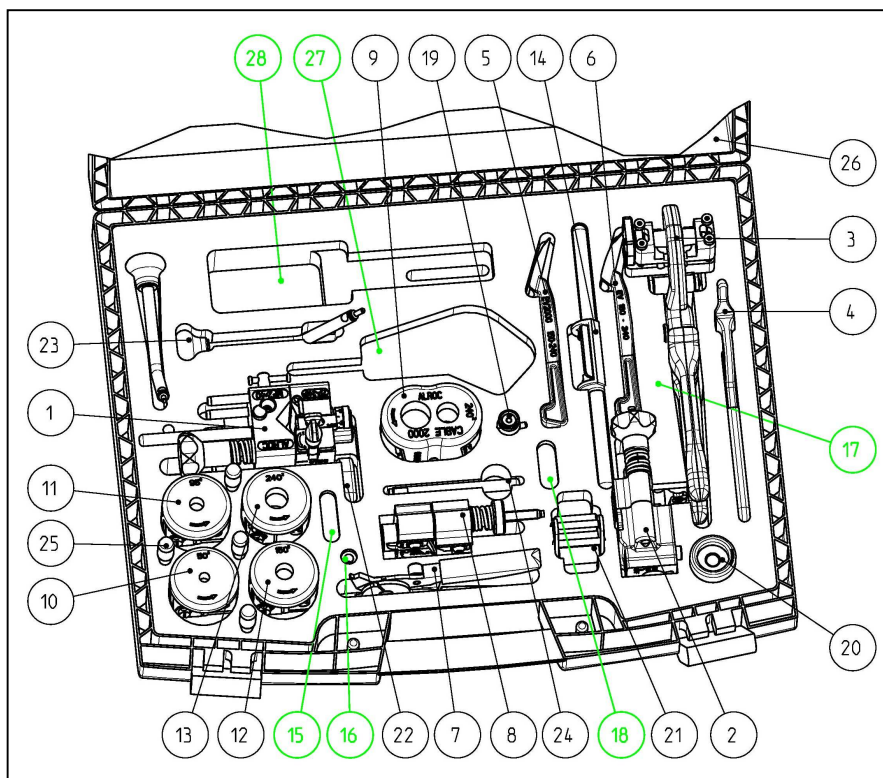

REP	FUNCTION	REFERENCE
1	<ul style="list-style-type: none"> ➤ Sheath cutting ➤ Insulation cutting 	MF2/40
2	<ul style="list-style-type: none"> ➤ Bonded semi-conductor removal ➤ Peelable semi-conductor incision 	MF1+
3	<ul style="list-style-type: none"> ➤ Split realization ➤ Sheath tightening 	FENTECRAN/40
4	Sheath opening	EV/NPT
5	Sheath widening	EV2000 150-240
6	Sheath widening	EV150-240
7	Clamps setting	LIGAREX
8	Insulation chamfering	LHA
9	Insulation tapering	TCD 2000
10	Insulation tapering	TC 50 ²
11	Insulation tapering	TC 95 ²
12	Insulation tapering	TC 150 ²
13	Insulation tapering	TC 240 ²
14	Scrapping residue from bonded semi-conductor	GRI

REP	FUNCTION	REFERENCE
15	MF2/40 spare blade position	LMF2
16	MF1+ spare blade position for peelable semi-conductor	LS
17	FENTECRAN/40 spare blade position	LFE
18	LHA soare blade position	LHAC
19	MF1+ adjustable stylet	SR
20	MF1+ measuring rod	PASC1-MV
21	Fentecran/40 wheel disc	GFE
22	Adjustable thrust	BR
23	MF2/40 and MF1+ handle	PCR
24	LHA handle	073/0017
25	TC handle	POTC
26	Empty plastic case	CNPT/240VR
27	ROTOGRATT position	RTT2
28	ROTO-TM position	ROTO-TM

- ☞ The tools must be used when the cable is out of tension by skilled workers who are competent in cable preparation and know about electrical phenomena.
- ☞ Wearing anti-cut gloves is obligatory.
- ☞ Clean the tools after each utilization.

ALROC S.A.S - ZI de la Fonderie - 72160 TUFFE - FRANCE - Tél : 33 (0)2.43.71.11.80 - Fax : 33 (0)2.43.71.16.51
Internet : www.alroc.fr - E.mail : commercial@alroc.fr - info@alroc.fr

S.A.S au capital de 800000€ - 341 050 987 RCS LE MANS - SIRET 341 050 987 00013 - APE 2453Z - TVA/FR 77 341 050 987