

**Section** \_\_\_\_\_

HV Semi-conductor

**Application** \_\_\_\_\_

Field

**PRODUCT BENEFITS**

Back-iron to set the pitch of the tool in order to get a good result over the insulation

**TOOL CAPACITY**

**Diameter** 100 - 140 mm  
3,937 - 5,512 inch

**Max cutting depth** 8 mm / 0,315 in

**TOOL DIMENSIONS**

**Length** 730 mm

**Width** 195 mm

**Height** 115 mm

**Weight without box** 6,5 Kg

**Packaging** None

**ALROC SAS**

Z.I. de la Fonderie - 72160 TUFFE  
FRANCE

Phone: +33 2 43 71 11 80

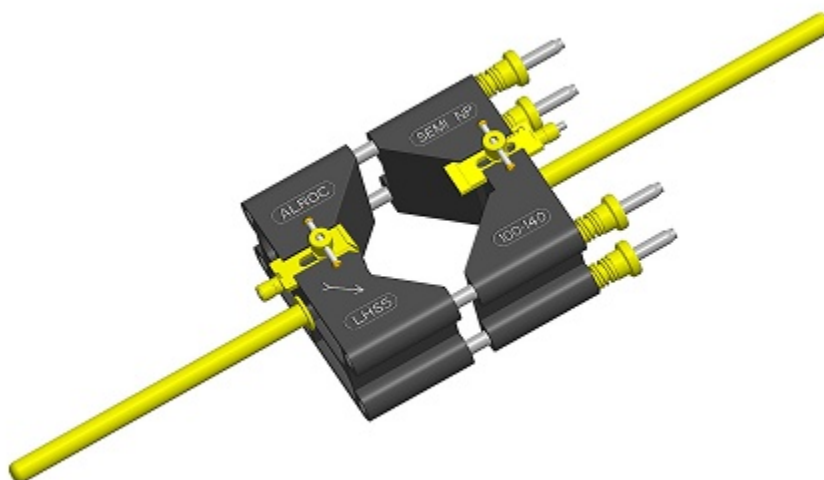
Fax number : +33 2 43 71 16 51

www.alroc.fr

## Tool for bonded non peelable semiconductor with silicone

**TO DO WHAT**

The LHS5 enables the user to remove bonded semiconductor realizing a right stop. Using the tool with silicone

**Spare part**

LASC5 - Blade for non-peelable semiconductor

**Associated tool**

LH5 - Monofunction tool for insulation

DM 95-145 - Stripping tool for HV and EHV cable's outer sheath and shield

HV cables Tools

# LHS5



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Max cutting depth	Length	Width	Height	
LHS2	38 - 60 mm 1,496 - 2,362 in	5 mm / 0,197 in	425 mm 16,732 in	105 mm 4,134 in	85 mm 3,346 in	box
LHS3	60 - 80 mm 2,362 - 3,150 in	10 mm / 0,394 in	460 mm 18,110 in	130 mm 5,118 in	85 mm 3,346 in	none
LHS4	80 - 110 mm 3,150 - 4,331 in	12 mm / 0,473 in	640 mm 25,197 in	155 mm 6,102 in	95 mm 3,740 in	none
LHS5	100 - 140 mm 3,937 - 5,512 in	8 mm / 0,315 in	730 mm 28,740 in	195 mm 7,677 in	115 mm 4,528 in	none