

Section _____

MV Outer sheath

Application _____

Field
Laboratory
Production



PRODUCT BENEFITS

Quick set up
Fits on PR4, PRG3 and PRG4

TOOL CAPACITY

Diameter 10 - 75 mm
0,394 - 2,953 inch

Thickness capacity 3,5 mm / 0,138 in

TOOL DIMENSIONS

Length 50 mm

Width 40 mm

Height 40 mm

Weight without box 0,04 Kg

Packaging None

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE
Phone: +33 2 43 71 11 80
Fax number : +33 2 43 71 16 51
www.alroc.fr

Interchangeable longitudinal cutting head with one cutting depth


TO DO WHAT

The TRL with single cutting depth, fits on any PR4, PRG3, PRG4 pliers in order to change the longitudinal cutting depth of the pliers according to the thickness of the outer sheath of the cable

Any cutting depth is available from 0,5 mm/0,019 in up to 5 mm/0,196 in

How does the P/N works : TRL/**

**= Cutting depth (e.g : TRL/25 -> cutting depth 2,5 mm/0,098 in)

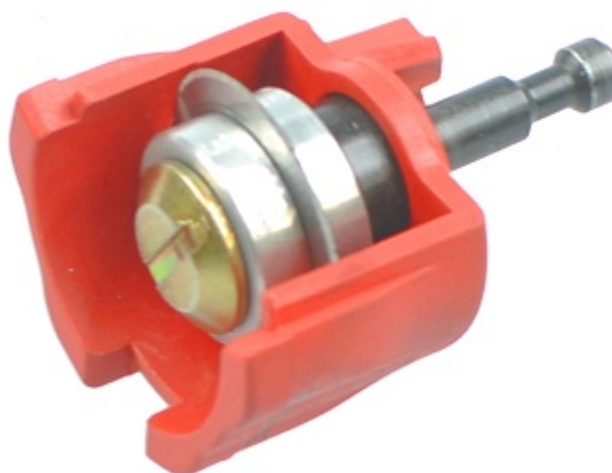

Associated tool

PRG3/C21-L212528 - Pliers for outer sheath for cable with O.D from Ø26mm/1,024in up to 52mm/2,047in

-
-

MV cables Tools

TRL/35



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Thickness capacity	Length	Width	Height	
TRL/12	10 - 75 mm 0,394 - 2,953 in	1,2 mm / 0,047 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/15	10 - 75 mm 0,394 - 2,953 in	1,5 mm / 0,059 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/18	10 - 75 mm 0,394 - 2,953 in	1,8 mm / 0,070 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/20	10 - 75 mm 0,394 - 2,953 in	2,0 mm / 0,078 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/25	10 - 75 mm 0,394 - 2,953 in	2,5 mm / 0,098 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/30	10 - 75 mm 0,394 - 2,953 in	3,0 mm / 0,118 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/35	10 - 75 mm 0,394 - 2,953 in	3,5 mm / 0,138 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/40	10 - 75 mm 0,394 - 2,953 in	4,0 mm / 0,157 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/45	10 - 75 mm 0,394 - 2,953 in	4,5 mm / 0,177 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/50	10 - 75 mm 0,394 - 2,953 in	5,0 mm / 0,196 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none