

Section

MV Outer sheath

ApplicationField
Laboratory
Production**PRODUCT BENEFITS**Quick set up
Fits on PR4, PRG3 and PRG4**TOOL CAPACITY**

| | |
|-----------------|----------------------------------|
| Diameter | 10 - 75 mm 0,394 - 2,953 inch |
|-----------------|----------------------------------|

| | |
|---------------------------|-------------------|
| Thickness capacity | 1,5 mm / 0,059 in |
|---------------------------|-------------------|

TOOL DIMENSIONS

| | |
|---------------|-------|
| Length | 50 mm |
|---------------|-------|

| | |
|--------------|-------|
| Width | 40 mm |
|--------------|-------|

| | |
|---------------|-------|
| Height | 40 mm |
|---------------|-------|

| | |
|---------------------------|---------|
| Weight without box | 0,04 Kg |
|---------------------------|---------|

| | |
|------------------|------|
| Packaging | None |
|------------------|------|

ALROC SASZ.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr

Interchangeable longitudinal cutting head with one cutting depth

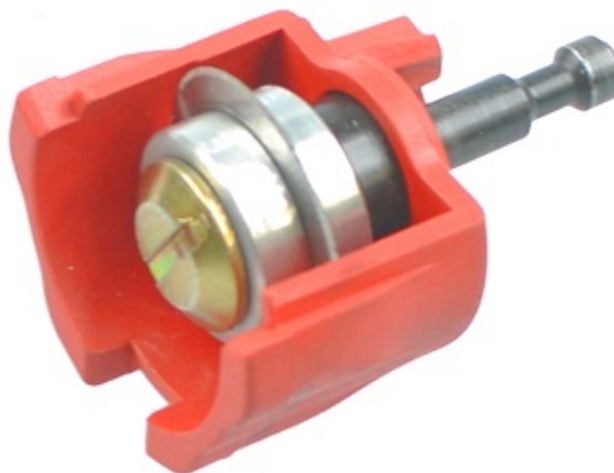
TO DO WHAT

The TRL with single cutting depth, fits on any PR4, PRG3, PRG4 pliers in order to change the longitudinal cutting depth of the pliers according to the thickness of the outer sheath of the cable

Any cutting depth is available from 0,5 mm/0,019 in up to 5 mm/0,196 in

How does the P/N works : TRL/**

**= Cutting depth (e.g : TRL/25 -> cutting depth 2.5 mm)

**Associated tool**

PRG3/C21-L212528 - Pliers for outer sheath for cable with O.D from Ø26mm/1,024in up to 52mm/2,047in

MV cables Tools

TRL/15



| Part Number | Diameter | Tool capacity | Dimensions | | | Packaging |
|-------------|--------------------------------|--------------------|-------------------|-------------------|-------------------|-----------|
| | | Thickness capacity | Length | Width | Height | |
| TRL/12 | 10 - 75 mm 0,394 - 2,953 in | 1,2 mm / 0,047 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/15 | 10 - 75 mm 0,394 - 2,953 in | 1,5 mm / 0,059 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/18 | 10 - 75 mm 0,394 - 2,953 in | 1,8 mm / 0,070 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/20 | 10 - 75 mm 0,394 - 2,953 in | 2,0 mm / 0,078 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/25 | 10 - 75 mm 0,394 - 2,953 in | 2,5 mm / 0,098 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/30 | 10 - 75 mm 0,394 - 2,953 in | 3,0 mm / 0,118 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/35 | 10 - 75 mm 0,394 - 2,953 in | 3,5 mm / 0,138 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/40 | 10 - 75 mm 0,394 - 2,953 in | 4,0 mm / 0,157 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/45 | 10 - 75 mm 0,394 - 2,953 in | 4,5 mm / 0,177 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |
| TRL/50 | 10 - 75 mm 0,394 - 2,953 in | 5,0 mm / 0,196 in | 50 mm 1,969 in | 40 mm 1,575 in | 40 mm 1,575 in | none |