

Section

MV Outer sheath

ApplicationField
Laboratory
Production**PRODUCT BENEFITS**

Quick set up of the cutting head on the plier

The interchangeable cutting head fit on PR4, PRG3, PRG4

3 different longitudinal cutting depth head is available

TOOL CAPACITY

Diameter	47 - 75 mm 1,850 - 2,953 inch
Circular cutting thickness capacity	3,5 mm / 0,137 in
Longitudinal cutting thickness capacity	4,0 mm / 0,157 in

TOOL DIMENSIONS

Length	300 mm
Width	120 mm
Height	105 mm
Weight without box	0,89 Kg
Packaging	Box

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr

Pliers for MV cable outer sheath with interchangeable longitudinal cutting depth

TO DO WHAT

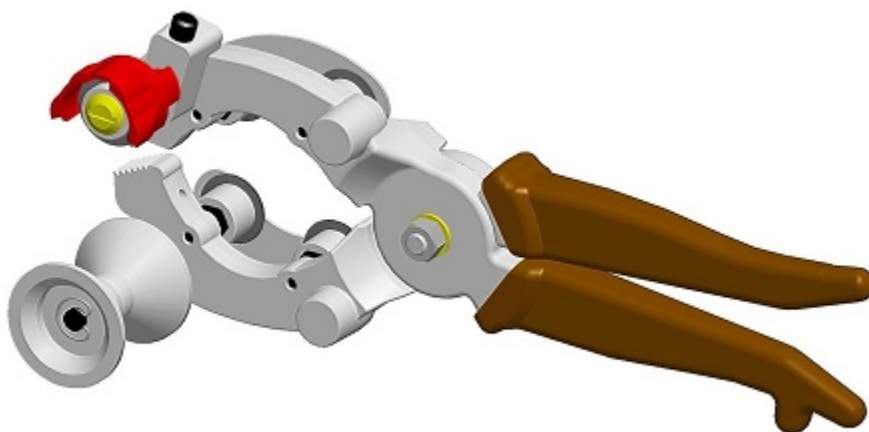
The pliers PRG4/C35-L40 enables the user to make a circular and longitudinal cut in order to remove cable's outer sheath

All cutting depth ranging from 0.5mm / 0.02 inch to 5mm / .2 inch are available on demand

How to built your customized pliers : PRG4/Cyy-Lzz

yy = Circular cutting depth e.g : 35 = 3.5 mm /.14 inch

zz = longitudinal cutting depth e.g : 40 = 4.0 mm /.16 inch

**Options**

SGM - Large size pouch

Spare part

MTC4/35 - Spare blade for circular cutting 3,5 mm / 0,138 in (x4)

TRL/40 - Wheel for longitudinal cutting

MTL4/40 - Spare blade for longitudinal cutting 4,0 mm / 0,157 in

Associated tool

CWB/18-60-FEP - Tool to remove bonded semiconductor with chamfer on the semiconductor cutback

MV cables Tools

PRG4/C35-L40



Part Number	Diameter	Tool capacity		Dimensions			Packaging
		Circular cutting thickness capacity	Longitudinal cutting thickness capacity	Length	Width	Height	
PRG4/C35-L40	47 - 75 mm 1,850 - 2,953 in	3,5 mm / 0,137 in	4,0 mm / 0,157 in	300 mm 11,811 in	120 mm 4,724 in	105 mm 4,134 in	box