

MV cables Tools

MF3/60-C



Certifications

Approved by ENEDIS

Section

MV Multifunction

Application

Field

Laboratory



PRODUCT BENEFITS

Tuning of the pitch of the tool
Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter	16 - 58 mm 0,630 - 2,283 inch
Peelable semicon thickness capacity	0.4 - 1.5 mm
Insulation thickness capacity	7 mm
Stylus included	SRC

TOOL DIMENSIONS

Length	305 mm
Width	115 mm
Height	165 mm
Weight without box	1,75 Kg
Packaging	Box

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr

Multifunction tool for outer sheath, peelable semiconductor and insulation


TO DO WHAT

The MF3/60-C tools enables the user to :

Remove the outer sheath (PE-PVC-PR) with a straight and neat cut

Score the peelable semiconductor with a chamfer on the edge of the semiconductor cutback (with the SRC scoring stylus delivered with the tool)

Set the length to be removed and remove the insulation with a straight and neat cut

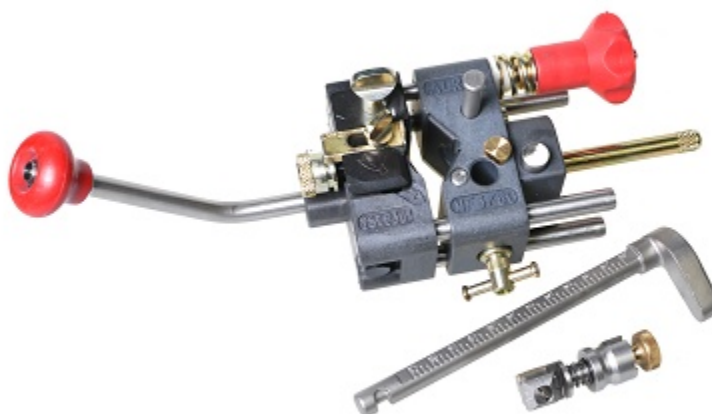

Options

SCH - Chamfering stylus for insulation

SR - Scoring stylus for peelable semiconductor

Spare part

KIT-MF3/40 - Protective wear pads

LMF2 - Spare blade for primary insulation

BR - Thrust to set the length of insulation to be remove

VBB1 - Screw for locking the thrust

PCR - Quick set up right angled 45° handle

196855 - Straight handle M10

108098 - Clamping knob for blade

LS-C - Spare blade for peelable semiconductor with chamfer

SRC - Scoring stylus for peelable semiconductor with chamfer

Associated tool

ALROC-FENTE - Tool to perform slits on cable's outer sheath

ROTO-TMG - Connector holder for bolted and clamping connections

DSP - Peelable semiconductor lifter

C-SR - Wrench to replace the semiconductor blade

MV cables Tools

MF3/60-C



Part Number	Diameter	Tool capacity			Dimensions			Packaging
		Pelable semicon thickness capacity	Insulation thickness capacity	Stylus included	Length	Width	Height	
MF3/40	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-C	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SR	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SRC	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SSR	16 - 40 mm 0,630 - 1,575 in	Option	7 mm	None	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/60	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-C	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SR	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SRC	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SSR	16 - 58 mm 0,630 - 2,283 in	Option	7 mm	None	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box