

Section _____

LV

Application _____

Field
Laboratory
Production



PRODUCT BENEFITS

3 different longitudinal cutting depth in one interchangeable cutting head
Quick set up of the cutting head
The interchangeable cutting head fit on PR4, PRG3, PRG4

TOOL CAPACITY

Diameter	7 - 25 mm 0,276 - 0,984 inch
Circular cutting thickness capacity	1,7 mm / 0,067 in
Longitudinal cutting thickness capacity	1,7-1,9-2,1 mm / 0,067-0,075-0,083 in

TOOL DIMENSIONS

Length	280 mm
Width	90 mm
Height	70 mm
Weight without box	0,7 Kg
Packaging	Box

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE
Phone: +33 2 43 71 11 80
Fax number : +33 2 43 71 16 51
www.alroc.fr


Pliers for MV cable outer sheath with 3 adjustable longitudinal cutting depths

TO DO WHAT

The PRG1/C17-L171921 enables the user to make a circular and longitudinal cut in order to remove cable's outer sheath

All cutting depth ranging from 0,5 mm / 0,020 in to 5 mm / 0,197 in are available on demand
Maximum cutting depth for the cutting head with 3 positions : 3,5mm / 0,138 in

How to built your customized pliers : PRG1/Cyy-Lzz zz zz
yy = Circular cutting depth e.g : 17 = 1,7 mm / 0,067 in
zz zz zz = 3 longitudinal cutting depth e.g : 17 19 21 = 1,7 - 1,9 -2,1 mm / 0,067 - 0,075 - 0,083 in

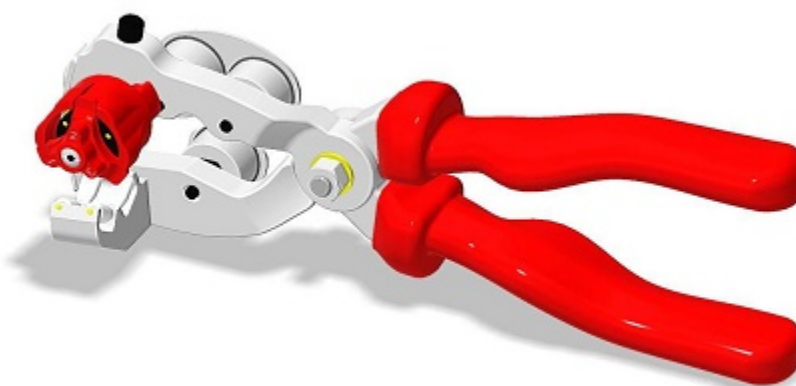

Options

SGM - Large size pouch

Spare part

MTCP1/17 - Spare blade for circular cutting 1,7 mm / 0,067 in (x3)
TRL/17-19-21 - Spare interchangeable longitudinal cutting head

LV cables Tools

PRG1/C17-L171921



Part Number	Diameter	Tool capacity		Dimensions			Packaging
		Circular cutting thickness capacity	Longitudinal cutting thickness capacity	Length	Width	Height	
PRG1/C17-L171921	7 - 25 mm 0,276 - 0,984 in	1,7 mm / 0,067 in	1,7-1,9-2,1 mm / 0,067-0,075-0,083 in	280 mm 11,024 in	90 mm 3,543 in	70 mm 2,756 in	box